

Glass shelf GERA light system 4

www.gera-leuchten.de



Technical Information 06/28/2016

Light connection	flexible behind the light, dircetly on the connecting terminal
Width	minimum 300 mm maximum 1200 mm
Depth	200
Capacity	5 kg/m
Attachment	laterally on cast zinc-chromed caps
Surface	anodised aluminium coloured anodised black-brown coloured
Features	micro button switch, white adaptation - adjustable from warm white to cold white and dimmable satin-finished single-pane safety glass

Light distribution diagram

Kelvin	2700	120°	Distance
Lux	620	•	250 mm
	280	•	500 mm
	140	•	750 mm
	90	•	1000 mm

Nominal voltage	230 V, 50 – 60 Hz
Illuminant	LED
Light colour white adaptation	2700 - 6500 K
Brightness	500 lm/m
Power	7,5 W/m
Energy efficiency class	A+
Protection class	⬇
Protection type	IP 20

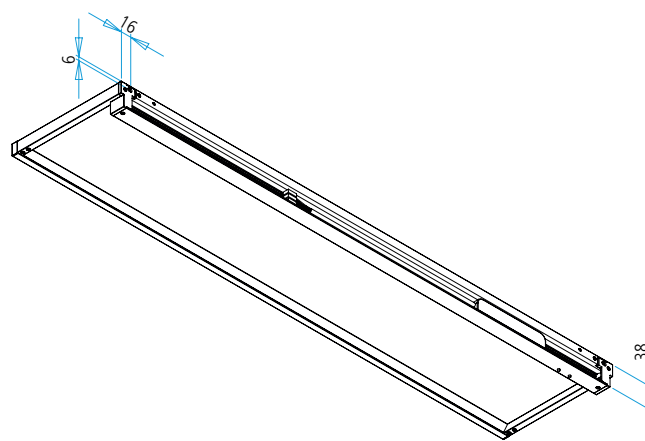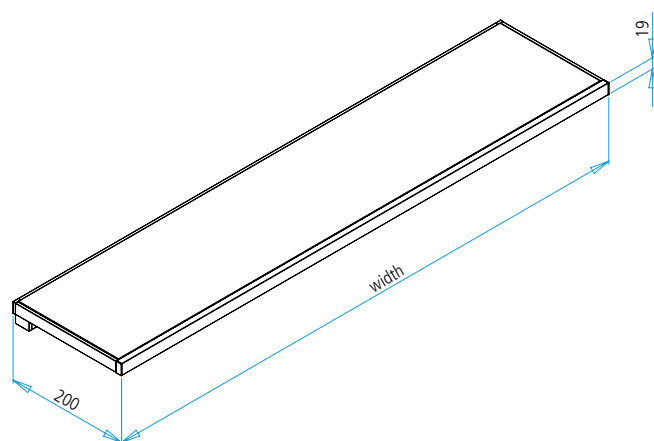

Dimensions in mm