

Light rail

GERA light system 6



Technical Information 06/28/2016

Light connection	left, connecting cable 1,5 m with mini plug
Length of light	minimum 300 mm maximum 3000 mm
Surface	anodised aluminium coloured anodised stainless steel coloured

Light distribution diagram

Kelvin	2700	120°	Distance
Lux	130	•	250 mm
	40	•	500 mm
	20	•	750 mm
	10	•	1000 mm

Nominal voltage	24 V DC
Illuminant	LED
Light colour	2700 K
Brightness	1000 lm/m
Power	14,5 W/m
Energy efficiency class	A+
Protection class	◊ I
Protection type	IP 20

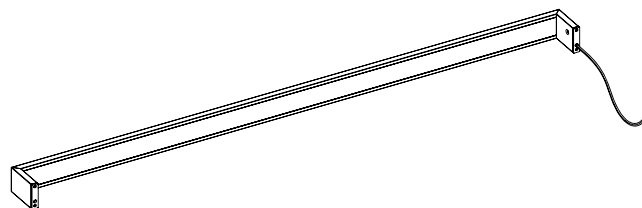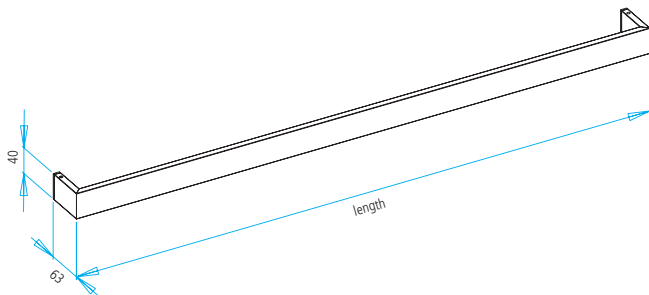

Dimensions in mm