

Light rail with glass shelf

GERA light system 6

www.gera-leuchten.de


Technical Information 28/11/2020

Light connection	left or right
Length of light	minimum 700 mm maximum 2380 mm
Capacity	10 kg/m
Surface	anodised aluminium coloured anodised stainless steel coloured anodised black-brown coloured
Features	micro button switch, white adaptation - adjustable from warm white to cold white and dimmable satin-finished single-pane safety glass socket 230 V USB charging socket

Light distribution diagram

Kelvin	2700	4000	6500	65°	Distance
Lux	100	110	130	•	250 mm
	30	35	40	•	500 mm
	20	20	25	•	750 mm
	10	10	15	•	1000 mm

Nominal voltage	230 V, 50-60 Hz
Illuminant	LED
Light colour white adaptation	2700 - 6500 K
Brightness	1000 lm/m
Power	14,5 W/m
Energy efficiency class	A+
Protection class	◊
Protection type	IP 20

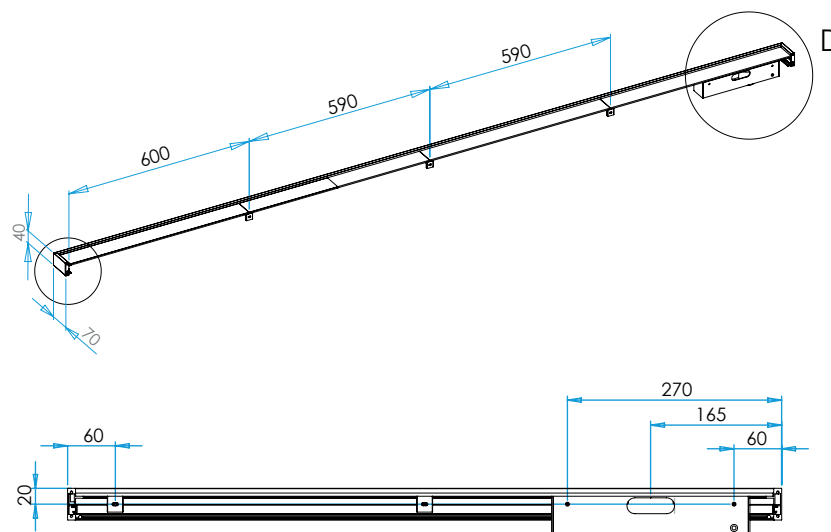


Dimensions in mm

Accessories for the light rail with glass shelf
GERA light system 6

www.gera-leuchten.de

Technical Information 03/03/2017

Surface	aluminium coloured or anodised black-brown coloured satin-finished single-pane safety glass solid oak, oiled
---------	---

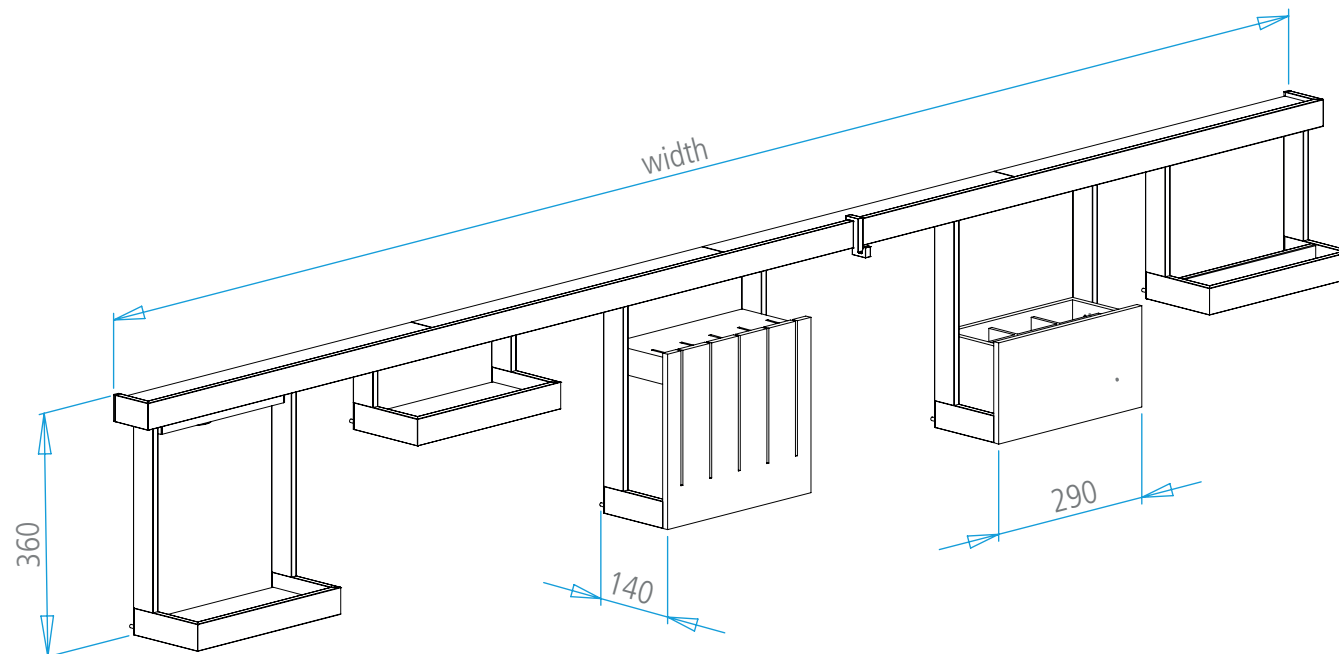

Dimensions in mm