

Coat rack light GERA light system 8

www.gera-leuchten.de

Technical Information 06/28/2016



Light connection	middle, directly on the connecting terminal
Length of light	minimum 600 mm maximum 1200 mm
Acryl cover	delivered in a shorter form due to heat expansion
Surface	anodised aluminium coloured anodised black-brown coloured
Features	Slot for hook rack micro button switch, white adaptation - adjustable from warm white to cold white and dimmable

Light distribution diagram

Kelvin	2700	4000	120°	Distance
Lux	540	600	•	250 mm
	230	270	•	500 mm
	120	140	•	750 mm
	90	100	•	1000 mm

Nominal voltage	230 V, 50 – 60 Hz
Illuminant	LED
Light colour white adaptation	2700 - 6500 K
Brightness	1000 lm/m
Power	14,5 W/m
Energy efficiency class	A

Protection class	⏚
Protection type	IP 20

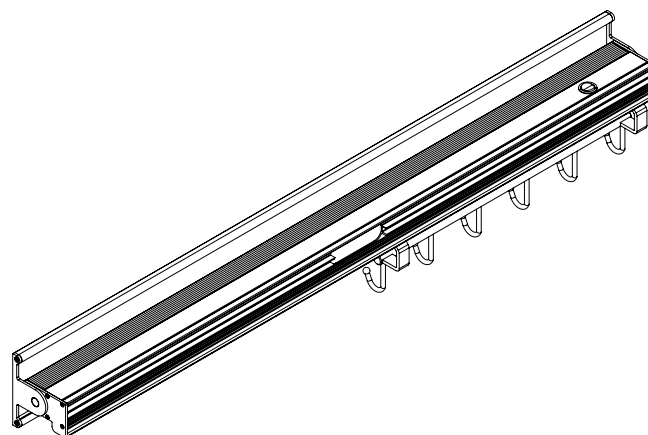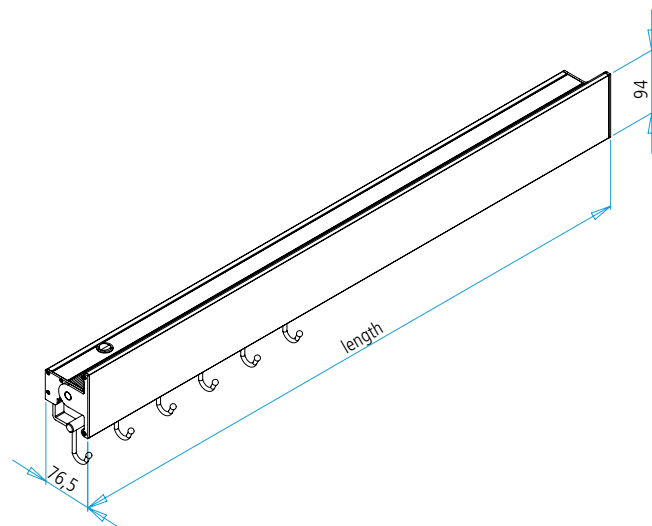

Dimensions in mm