

Under-unit light GERA light system 2

www.gera-leuchten.de



Technical Information 06/28/2016

Light connection	left, connecting cable 2 m, three-pin plug enclosed
Length of light	minimum 300 mm maximum 2400 mm
Surface	anodised aluminium coloured anodised stainless steel coloured
Features	Slot for Linero 2000, Kesseböhmer white adaptation - adjustable from warm white to cold white and dimmable

Light distribution diagram

Kelvin	2700	4000	6500	85°	Distance
Lux	1220	1400	1560	•	250 mm
	550	640	710	•	500 mm
	300	350	380	•	750 mm
	200	230	250	•	1000 mm

Nominal voltage	230 V, 50 – 60 Hz
Illuminant	LED
Light colour White Adaptation	ON 2700 - 6500 K
Brightness	1000 lm/m
Power	14,5 W/m
Energy efficiency class	A+
Protection class	◊ I
Protection type	IP 20

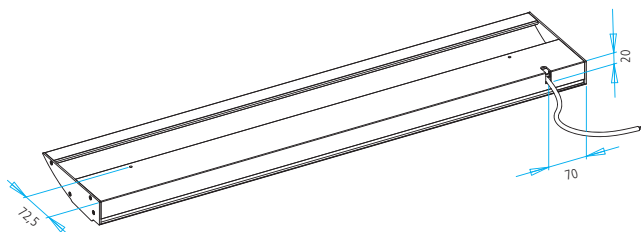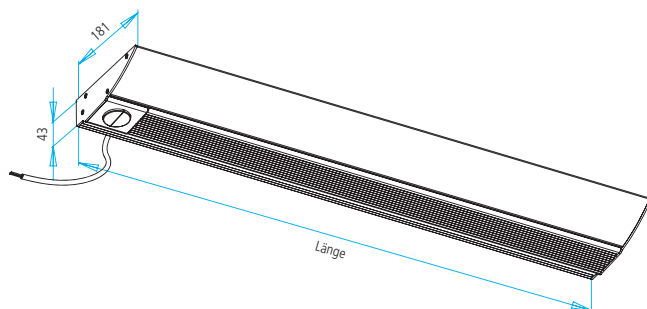

Dimensions in mm